


ELYTONE ELECTRONIC CO., LTD.

Testing Item	Specification
Operating Temperature Range :	-40 +80
General Electrical Specifications at :	25
Input Voltage :	100 Voltage
Input Power Range :	2W / 1W / 0.5W / 0.25W
Output Load :	4 or 8
Core Type :	EI 41H
Inductance : @ 50 Hz , 1.0 Vrms	64 H minimum. (0.25 W at other windings open)
D.C. Resistance :	1558 maximum. (Input)
	0.25 maximum. (Output)
Leakage Inductance : @ 15K Hz , 1.0 Vrms	60 mH maximum. (0.25 W with 8 Shorted)
Interwinding Capacitance : @ 15K Hz , 1.0 Vrms	450 pF maximum. (Input to Output)
Frequency Response : @ 1K Hz reference	± 2.0 dB (50 Hz ~ 15K Hz) @ 2 W , Load 4
Insertion Loss : @ 1K Hz reference	1.0 dB maximum. @ 2 W , Load 4
Total Harmonic Distortion :	2.5 % maximum. @ 100 Hz , 2 W , Load 4
Power Transfer Efficiency :	80 % minimum @ 2 W , Load 4
Turns Ratio : Input com ~ 0.25 W @ 1K Hz , 100 Voltage	2.51 V \pm 3 % @ 2W , Load 4
	1.82 V \pm 3 % @ 1 W , Load 4
	1.31 V \pm 3 % @ 0.5 W , Load 4
	0.94 V \pm 3 % @ 0.25 W , Load 4
Hi-Pot Test :	1000 VAC 60 Hz 1 minute form Input to Output
Safety :	comply with the requirements of EU RoHS Directive.

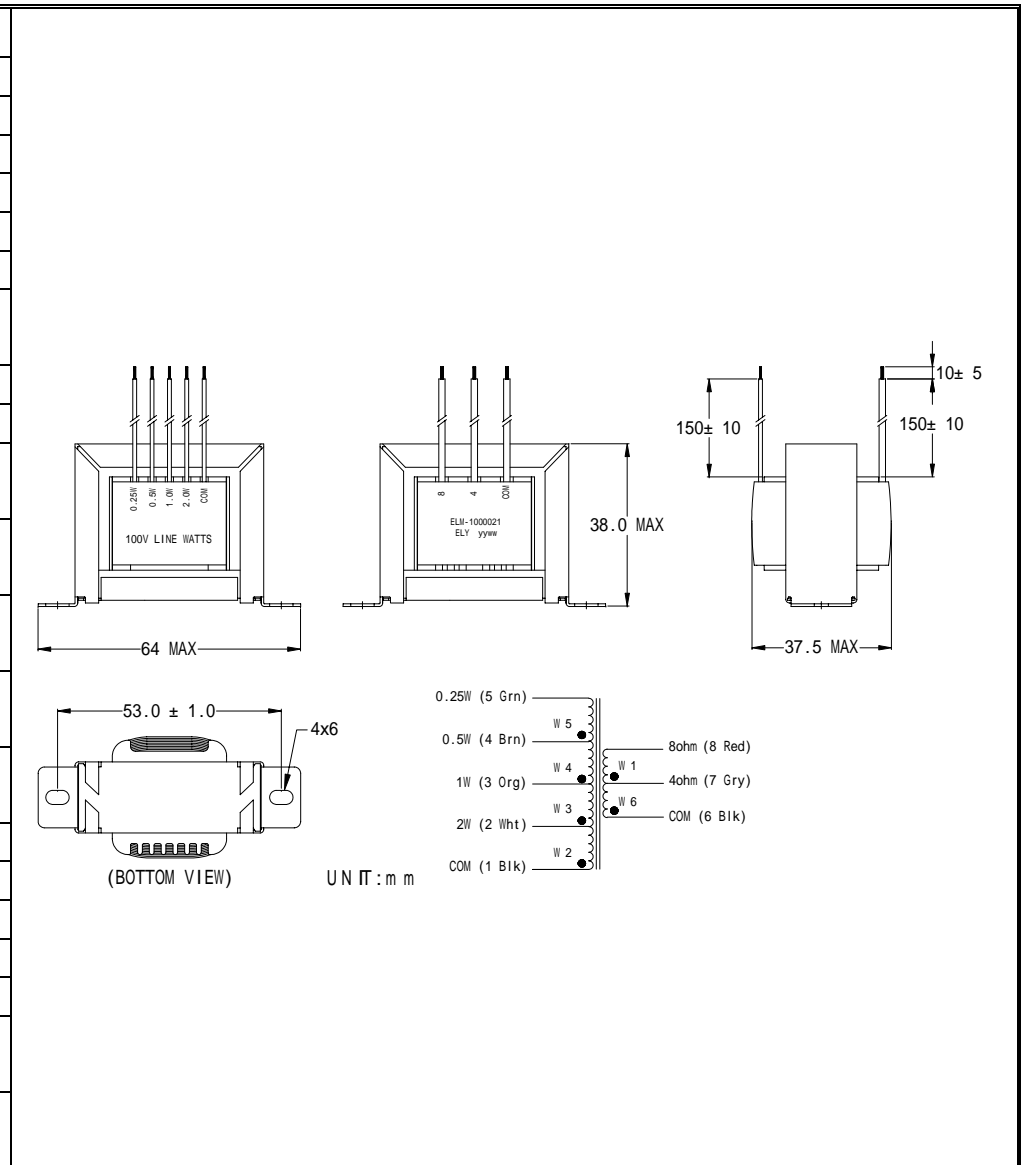

Customer :	Part No. :	ELM-1000021	Rev. : 1	Sample No. : YT-
------------	------------	-------------	----------	------------------