
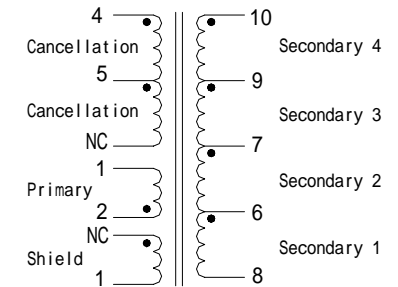
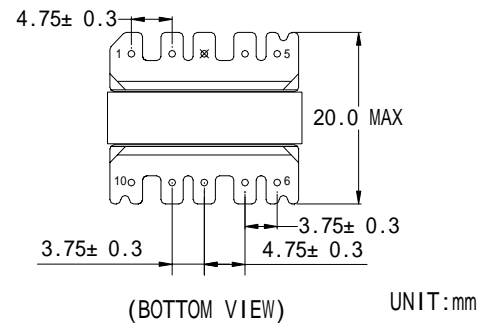
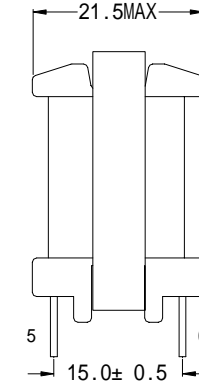


ELYTONE ELECTRONIC CO.,LTD.

Testing Item	Specification
General Electrical Specifications at :	25
Operating Temperature :	-20 ~ 80
Primary Voltage Range :	90VAC~265VAC
Secondary Voltage Range :	3.4/12/5/6/14/40 VDC
Output Power Range :	11W
Core Type :	EEL22
Inductance : @ 100 KHz , 0.1Vrms	880 uH ±10% (2-1 at other windings open)
D.C Resistance :	2.5 max. (2-1)
	182 m max. (4-5)
	11.0 m max. (6-8)
	9.0 m max. (7-6)
	73.0 m max. (9-7)
252 m max. (10-9)	
Leakage Inductance : @ 100 KHz , 0.1 Vrms	50.0 μ H max. (2-1 with 6~10 Shorted)
Self Resonance Frequency :	900 KHz min. (2-1 at other windings open)
Hi-Pot Test :	3000 VAC 60 Hz 1 sec. form pins 1~5 to Pins 6~10
Safety	<ol style="list-style-type: none"> 1. Designed for Use with Power Integrations IC's, TopSwitch TOP245P 2. Designed to comply with the requirements of IEC950, EN60950, UL1950/CAS950 and AS/NZS3260 supplementary insulation with 300V working voltage. 3. Designed to comply with the requirements of UL, IEC & CSA Insulation System Class B. 4. Comply with the requirements of EU RoHS Directive.

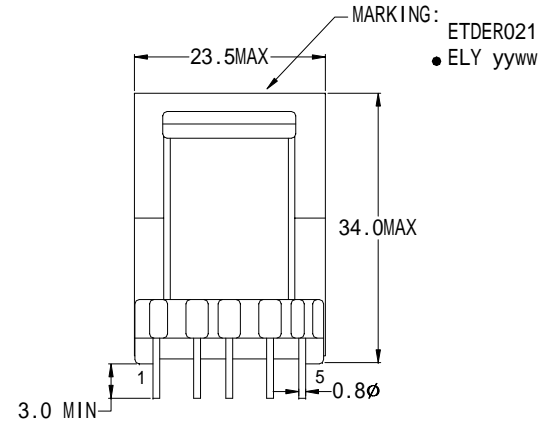

Part NO. : ETDER021

Rev. : A

Sample No. : YTB-17681