


ELYTONE ELECTRONIC CO.,LTD.

Testing Item	Specification
General Electrical Specifications at :	25
Operating Temperature :	-20 ~-80
Primary Voltage Range :	98VAC~135VAC
Secondary Voltage Range :	1.8/3.3/7/17/22 VDC
Output Power Range :	16W
Core Type :	EF25
Inductance : @ 100 KHz , 0.1 Vrms	1.31 mH - 0/+15% (4-1 at other windings open)
D.C Resistance :	2.2 max. (4-1)
	145 m max. (5-2)
	6.0 m max. (6-7)
	10.5 m max. (7-8)
	47.0 m max. (8-9)
29.0 m max. (9-10)	
Leakage Inductance : @ 100 KHz , 0.1 Vrms	30.0 μ H max. (4-1 with 6~10 Shorted)
Self Resonance Frequency :	600 KHz min. (4-1 at other windings open)
Hi-Pot Test :	3000 VAC 60 Hz 1 sec. form pins 1~5 to Pins 6~10
Safety	<ol style="list-style-type: none"> 1. Designed for Use with Power Integrations IC's, TopkSwitch-GX TOP244P 2. Designed to comply with the requirements of IEC950,EN60950, UL1950/CAS950 and AS/NZS3260 supplementary insulation with 150V working voltage. 3. Designed to comply with the requirements of UL,IEC & CSA Insulation System Class B. 4. Comply with the requirements of EU RoHS Directive.

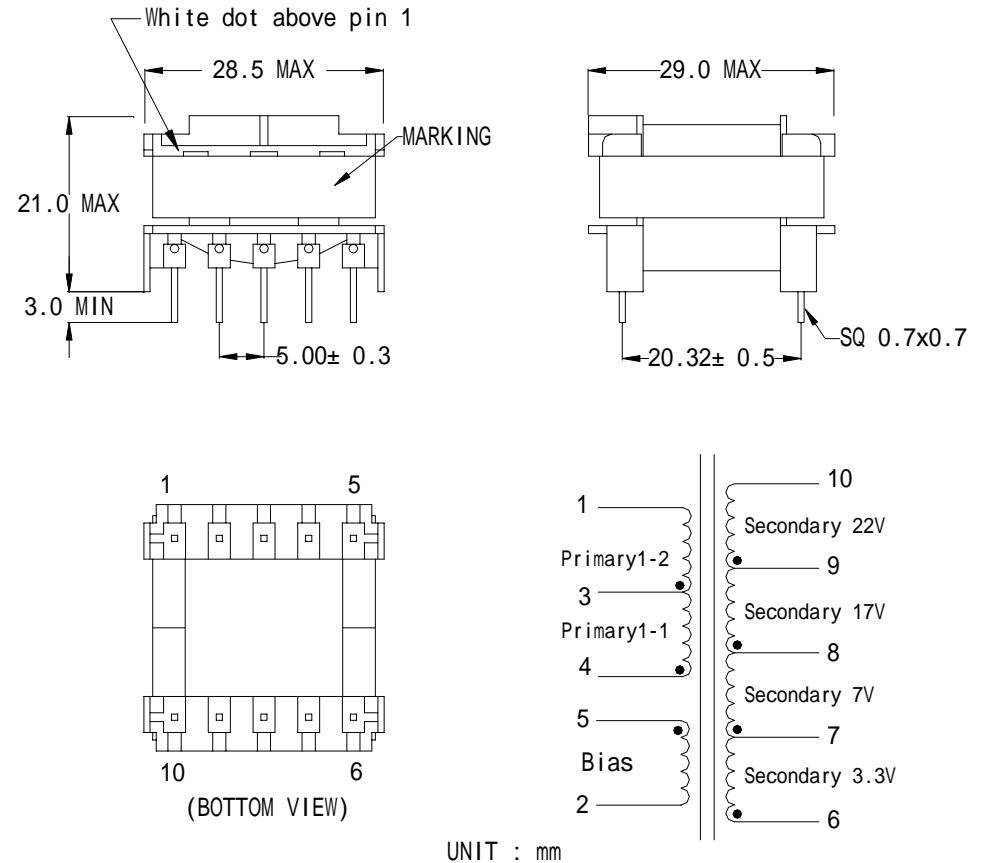

Part NO. : ETDER022

Rev. : A

Sample No. : YTB-17766