

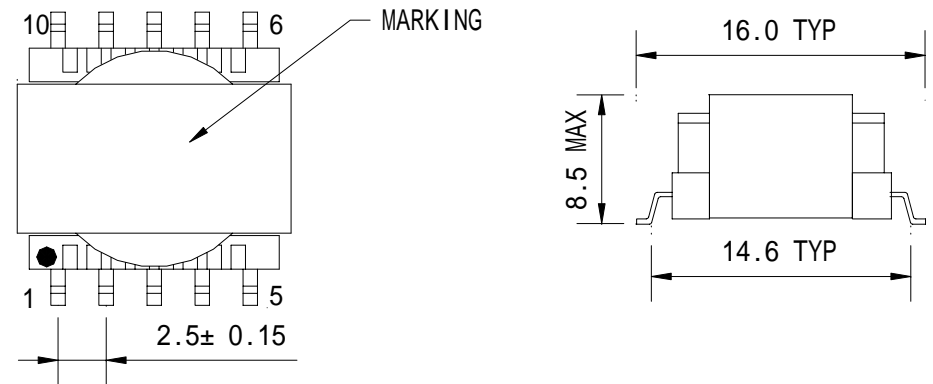


ELYTONE ELECTRONIC CO.,LTD.

| Testing Item | Specification |
|--|--|
| General Electrical Specifications at : | 25 |
| Operating Temperature : | -20 ~-80 |
| Primary Voltage Range : | 36VDC~72VDC |
| Secondary Voltage Range : | 3.3 VDC |
| Output Power Range : | 6.6W |
| Core Type : | ER14.5 |
| Inductance : @ 100 KHz , 0.1 Vrms | 120 uH ±10% (3-1 at other windings open) |
| D.C Resistance : | 0.48 max. (3-1) |
| | 185 m max. (4-5) |
| | 9.0 m max. (9,10-6,7) |
| Leakage Inductance : @ 100 KHz , 0.1 Vrms | 4.0 μ H max. (3-1 with 6~10 Shorted) |
| Self Resonance Frequency : | 7.5 MHz min. (3-1 at other windings open) |
| Hi-Pot Test : | 1500VDC 60 Hz 1 sec. form pins 1~5 to Pins 6~10 |
| Safety | <p>1. Designed for Use with Power Integrations IC's, DPA-Switch DPA423G</p> <p>2. Comply with the requirements of EU RoHS Directive.</p> |

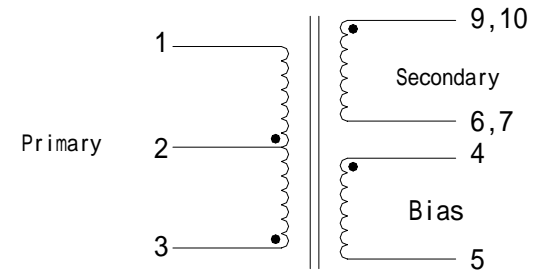

Note: White dot above pin 1



Part NO. : ETERP071

Rev. : A

Sample No. : YT-17629