
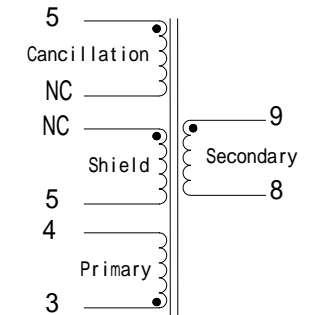



ELYTONE ELECTRONIC CO.,LTD.

Testing Item	Specification
General Electrical Specifications at :	25
Operating Temperature :	-20 ~-80
Primary Voltage Range :	85VAC~265VAC
Secondary Voltage Range :	6.2 VDC
Output Power Range :	2.0W
Core Type :	EE16
Inductance : @ 100 KHz , 0.1 Vrms	2.64 mH ±12% (3-4 at other windings open)
D.C Resistance :	12.0 max. (3-4)
	89.0 m max. (9-8)
Leakage Inductance : @ 100 KHz , 0.1 Vrms	70.0 μ H max. (3-4 with 8,9 Shorted)
Self Resonance Frequency :	275 KHz min. (3-4 at other windings open)
Hi-Pot Test :	3000 VAC 60 Hz 1 sec. form pins 1~5 to Pins 8~9
Safety	<ol style="list-style-type: none"> 1. Designed for Use with Power Integrations IC's, LinkSwitch-XT LNK362P 2. Designed to comply with the requirements of IEC950,EN60950, UL1950/CAS950 and AS/NZS3260 supplementary insulation with 300V working voltage. 3. Designed to comply with the requirements of UL,IEC & CSA Insulation System Class B. 4. Comply with the requirements of EU RoHS Directive.

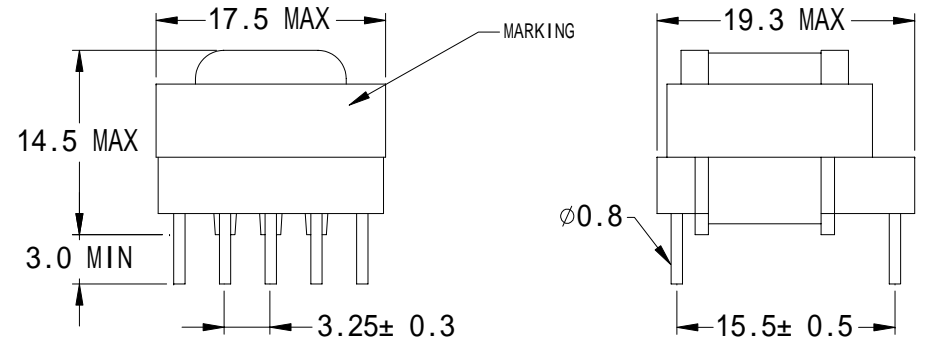

UNIT : mm

Part NO. : ETEPR089

Rev. : A

Sample No. : YTB-17675