




ET-52500 SERIES




AC Line Filters EMI / RFI Common Mode Choke



- Prevents noise emission, such as electromagnetic interference (EMI) & radio frequency interference (RFI)
- Protects AC side from the effects of switching regulators
- Wide range of available inductances and current ratings

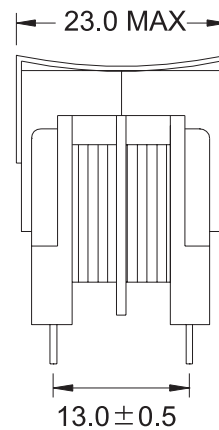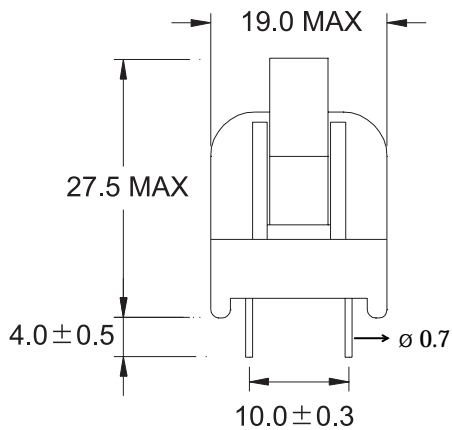

(BOTTOM VIEW)



UNIT:mm

Part Number	Inductance (mH MIN)	DCR (Ω Max)	Rated current Iac (A)
ET - 52501	30	2.8	0.4
ET - 52502	20	1.6	0.5
ET - 52503	10	1.2	0.6
ET - 52504	8	0.8	0.8
ET - 52505	6	0.5	1.0
ET - 52506	4	0.4	1.0
ET - 52507	3.5	0.3	1.2
ET - 52508	1.5	0.15	1.5

1. Inductance tested at 10kHz, 0.1Vrms.
2. Rated voltage : 250VAC/VDC
3. With standing voltage: 2000VAC (one minute, between lines).
4. Insulation resistance: at 500VDC, more than 100M Ω (between lines).
5. Electrical specifications at 25°C.